

BALI L Series

- DUS906L B/B (Black fixture w/Black non-glare reflector)
- DUS907L B/G (Black fixture w/Gold accent reflector)
- DUS908L W/B (White fixture w/Black non-glare reflector)
- DUS909L W/G (White fixture w/Gold accent reflector)

LED Surface ceiling luminaire.
Direct downlight w/adjustable 10° gimble.
Driver included.

FIXTURE:

Mounting: surface ceiling
Finish/Reflector: Black/Black (B/B), Black/Gold (B/G),
 White/Black (W/B), White/Gold (W/G)
Material: Aluminum
 Damp Location Listed
CSA/US Listed

LAMP/LED SOURCE/COLOR TEMP:

-930 9.3W LED / 3000K / 38° CRI ≥ 90 / 1120lm
-927 9.3W LED / 2700K / 38° CRI ≥ 90 / 1070lm
 Efficacy (CRI ≥ 90): 120lm/W, Rated life > 50000hrs

DRIVER:

-120V-DIM Class 2 120Vac 60Hz
 TRIAC/ELV (leading/trailing edge dimmable)
 Power factor ≥ 0.9 / Flicker (THD) ≤ 20%, Constant current 500mA

OPTIONS:

-38 -15 -25 reflector with 38°(Standard),15° or 25° beam angle

photometric files, dimming compatibility list and warranty information available online at www.dslightingus.com


Project:

Type:


Cat. No.:



Measurements (Inches)

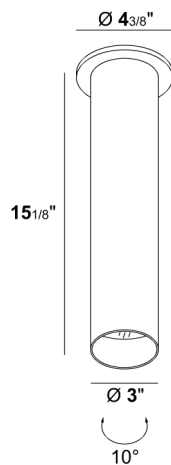

Light Distribution(38° Beam Angle) Standard

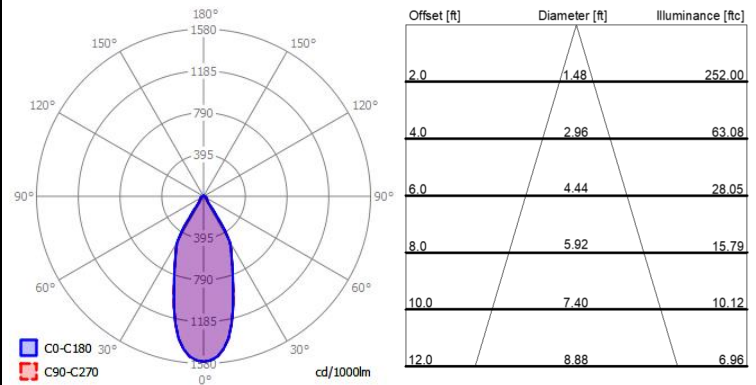


ORDERING INFORMATION

-SUFFIX

Model Number	Finish	LED Source	Color Temp.		Driver	Reflector		
DUS906L	-B/B	-9.3W	-927	-930	-120V-DIM	-38	-15	-25
DUS907L	-B/G							
DUS908L	-W/B							
DUS909L	-W/G							

COLOR OPTIONS

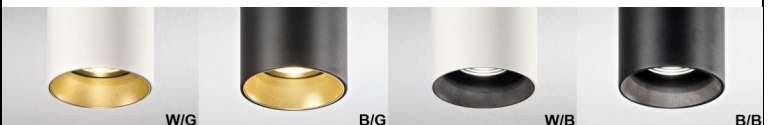

Example of Catalog #: DUS909L-W/G-9.3W-930-120V-DIM-25

DLS Lighting US
 3135 SR 580, Suite 6
 Safety Harbor, FL 34695
www.dslightingus.com
dlsus@dslightingus.com

