

INSTALLATION INSTRUCTION

DUS211 PIPER suspended


PROCEDURE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved. Do not install insulation within 3" of fixture sides or wiring compartment, nor above fixture in such a manner to entrap heat.


1. Put the primary leads from the junction box through the round mounting plate. Screw the round mounting plate on the 4" junction box.
2. Connect the primary leads with the two luminaire wires with the provided clamps. Connect the ground wire, which is attached to the canopy (Green-to-Ground). ATTENTION: Carefully, place all the wiring into the junction box and canopy.
3. Fit the canopy on the round mounting plate. Screw the two Allen bolts (1.5 mm) on the side.
4. If height adjustment is necessary you can push the three sleeves at the canopy plate to change cable length.




1.

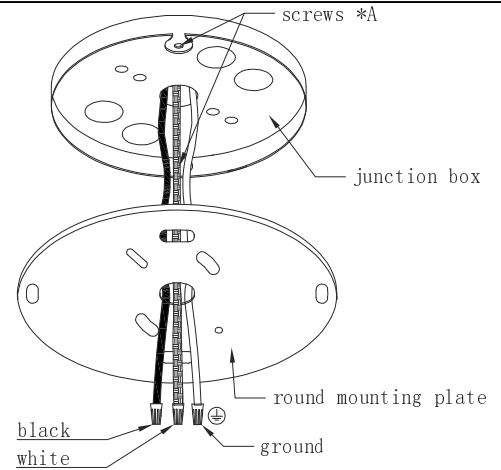


2.

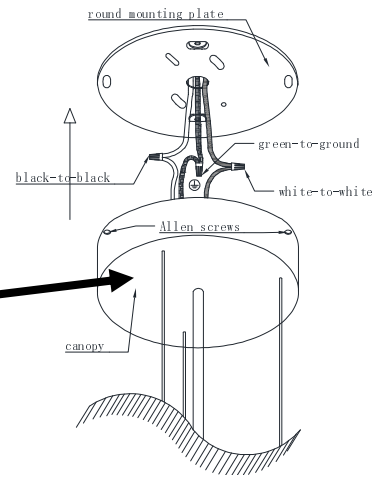

3.

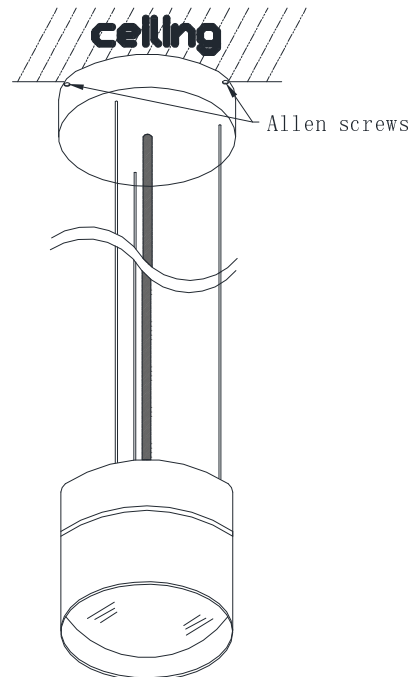

- Necessary installation equipment and screws:

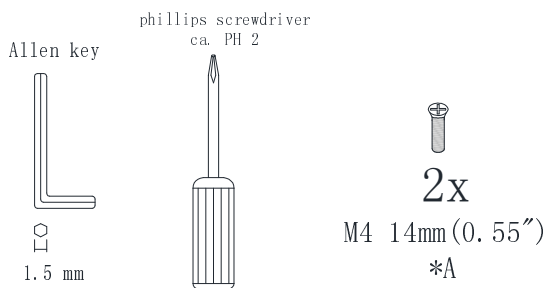

- Damp Location Listed
- CSAus Certified

IMPORTANT SAFETY INSTRUCTIONS:

- READ all the instructions before installation. Save instructions for later use.
- MIN 60°C SUPPLY CONDUCTORS.
- Turn off power at fuse or circuit breaker box before installation or before doing any maintenance work.
- Product must be mounted in locations and at heights and in manner consistent with its intended use, and in compliance with National Electric Code and local codes. Use of accessory equipment is not recommended.
- Installing contrary to instructions may cause unsafe conditions.
- Warning: Risk of fire. Consult a qualified electrician before installation.
- To avoid hazards to children, account all parts and properly dispose of all packaging materials.
- If there are any installation questions, contact us at <http://www.dslightingus.com>