

# PIPER

DUS253 White

Project:

Type:

Cat. No.:

**LED Surface ceiling luminaire. Direct downlight.  
Driver included.**

**FIXTURE:**

**Mounting:** surface ceiling  
**Finish:** White  
**Material:** Aluminum, acrylic glass cover  
Damp Location Listed (for use indoors)  
**CSA/US Listed**

**LAMP/LED SOURCE/COLOR TEMP:**

**-930**  
15W LED / 3000K / CRI ≥ 80 / 1760lm  
Efficacy (CRI ≥ 90): 117lm/W, Rated life > 50000hrs

**DRIVER:**

**-120V-DIM**  
Class 2 120Vac/60Hz, TRIAC/ELV dimmable (leading/trailing edge),  
Power factor ≥ 0.9 / Flicker (THD) ≤ 20%, Constant current 700mA

**OPTIONS:**


**-120V/277VDIM10V**  
Driver: Class 2 120V/277Vac/60Hz, 0-10V dimmable

photometric files, dimming compatibility list and warranty information  
available online at [www.dslightingus.com](http://www.dslightingus.com)




Shown above: DUS253-white-15W-930-120V/277VDIM10V

### Measurements (Inches)

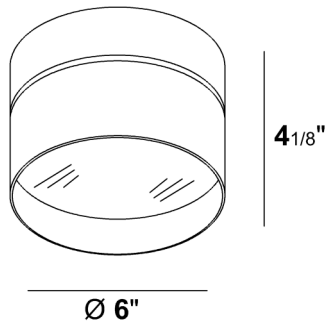

### Light Distribution / Illuminance (120°)

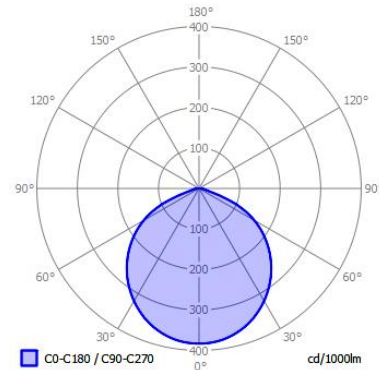

Offset [ft]	Diameter [ft]	Illuminance [fc]
2.0	5.24	191.9
4.0	10.48	48.0
6.0	15.72	21.3
8.0	20.96	12.0
10.0	26.20	7.7
12.0	31.44	5.3

### ORDERING INFORMATION

**-SUFFIX**

Model Number	Finish	LED Source	Color Temp.	Driver	
DUS253	-white	-15W	-930	-120V-DIM	-120V/277V DIM10V
-	-				
-	-				
-	-				

Example of Catalog #: DUS253-white-15W-930-120V-DIM

DLS Lighting US  
3135 SR 580, Suite 6  
Safety Harbor, FL 34695  
[www.dslightingus.com](http://www.dslightingus.com)  
[dlsus@dslightingus.com](mailto:dlsus@dslightingus.com)

263381

