

RIO

DUS244

Satin Aluminum

Project:

Type:

Cat. No.:

LED Surface wall luminaire. indirect up/down sconce.
Driver included.

FIXTURE:

Mounting: surface wall

Finish: Satin Aluminium

The Satin Aluminum finish is "brushed aluminium w/clear coat".

Material: Aluminum

Wet Location Listed (for use indoors and outdoors)

CSA/US Listed

LAMP/LED SOURCE/COLOR TEMP:

-830

2x1W LED / 3000K / CRI ≥ 80 / 2x160lm

Efficacy (CRI ≥ 80): 160lm/W, Rated life > 50000hrs


DRIVER:

-120V-DRI

Class 2 120Vac/60Hz, not dimmable

Power factor ≥ 0.9 / Flicker (THD) ≤ 20%, Constant current 350mA


photometric files, dimming compatibility list and warranty information
available online at www.dslightingus.com

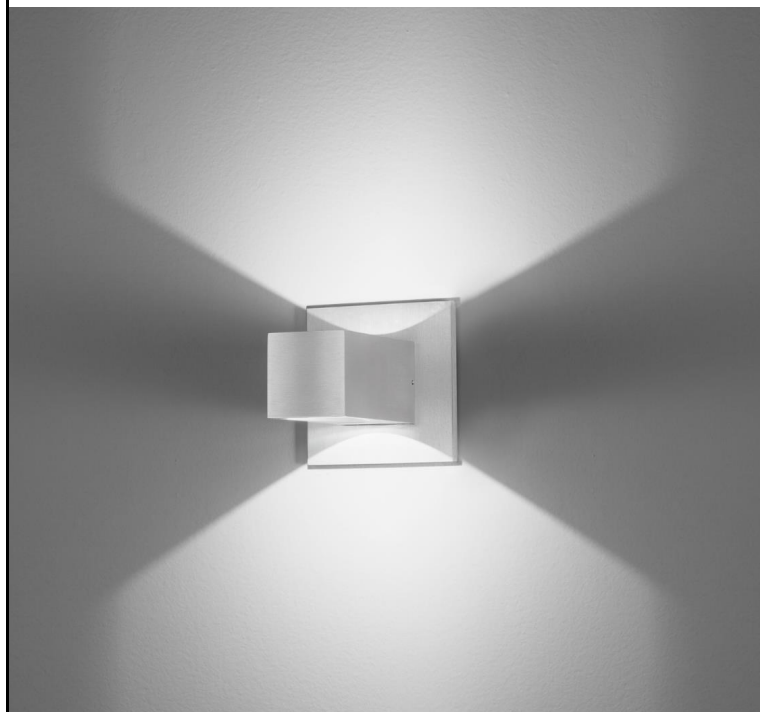

Shown above: DUS244-satin alu-2x1W-830-120V-DRI

Measurements (Inches)

Light Distribution

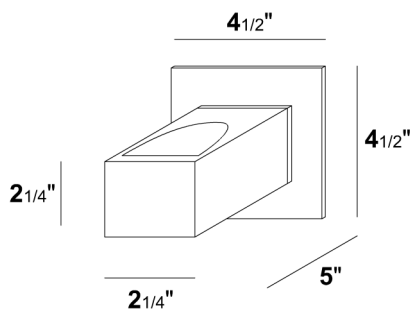

n/a

ORDERING INFORMATION

-SUFFIX

Model Number	Finish	LED Source	Color Temp.	Driver
DUS244	-satin alu	-2x1W	-830	-120V-DRI
-	-			
-	-			
-	-			

Example of Catalog #: DUS244-satin alu-2x1W-830-120V-DRI

DLS Lighting US
3135 SR 580, Suite 6
Safety Harbor, FL 34695
www.dslightingus.com
dlsus@dslightingus.com

