

GINGER

DUS286 White

Project:

Type:

Cat. No.:

LED Surface wall luminaire. indirect up/down sconce.
Driver included.

FIXTURE:

Mounting: surface wall
Finish: White ("powder coat")
Material: Aluminum
Damp Location Listed (for use indoors)
CSA/US Listed

LAMP/LED SOURCE/COLOR TEMP:

-930
7W LED / 3000K / CRI ≥ 90 / 810lm
Efficacy (CRI ≥ 90): 115lm/W, Rated life > 50000hrs
-927
7W LED / 3000K / CRI ≥ 90 / 760lm
Efficacy (CRI ≥ 90): 108lm/W, Rated life > 50000hrs

DRIVER:


-120V-DIM
Class 2 120Vac/60Hz, TRIAC/ELV dimmable (leading/trailing edge),
Power factor ≥ 0.9 / Flicker (THD) ≤ 20%, Constant current 200mA

photometric files, dimming compatibility list and warranty information
available online at www.dslightingus.com




Shown above: DUS286-white-7W-930-120V-DIM

Measurements (Inches)

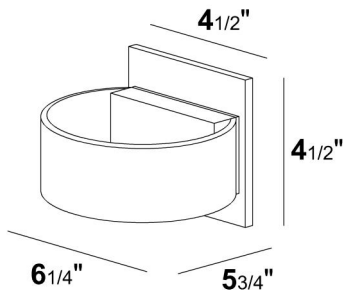

Light Distribution

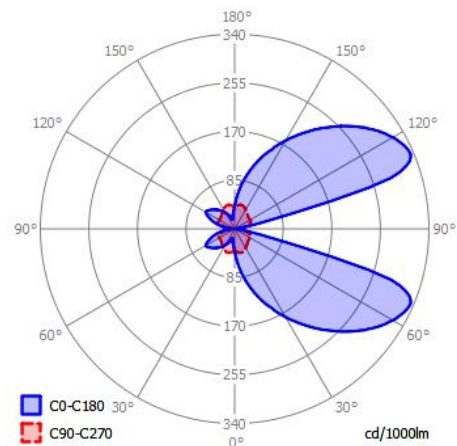

ORDERING INFORMATION

-SUFFIX

Model Number	Finish	LED Source	Color Temp.		Driver
DUS286	-white	-7W	-930	-927	-120V-DIM

Example of Catalog #: DUS286-white-7W-930-120V-DIM

DLS Lighting US
3135 SR 580, Suite 6
Safety Harbor, FL 34695
www.dslightingus.com
dlsus@dslightingus.com

