

# SPAGO 90 + diffuser

DUS759-11-20-03D white

DUS759-11-20-05D black

**LED Surface ceiling pendant luminaire. Direct downlight. Including acrylic glass diffuser. Driver included.**

**FIXTURE:**

**Mounting:** surface ceiling  
**Finish/Reflector:** White, Black  
**Material:** Brass Tube  
 Damp Location Listed (for use indoors)  
**CSA/US Listed**

**LAMP/LED SOURCE/COLOR TEMP:**

2W LED / 2700K / 40° / CRI ≥ 90 / 230lm  
 Efficacy (CRI ≥ 90): 132lm/W, Rated life > 50000hrs

**DRIVER:**

Class 2 120Vac/60Hz, not dimmable,  
 Power factor ≥ 0.9 / Flicker (THD) ≤ 20%, Constant current 500mA

**OPTIONS:**

- 2M 78-3/4" Cord (Standard)
- 5M 197" Cord

Further mounting options see DUS-LP5, DUS-LP7 and DUS-LP8 spec sheets.

photometric files, dimming compatibility list and warranty information available online at [www.dslightingus.com](http://www.dslightingus.com)

**Project:**


**Type:**

**Cat. No.:**




Shown above: DUS756-11-20-05D-2M (SPAGO 60)

## Measurements (Inches)

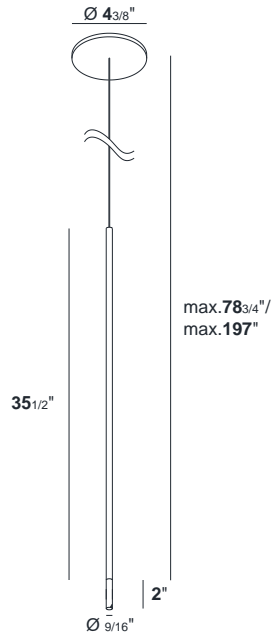

## Light Distribution

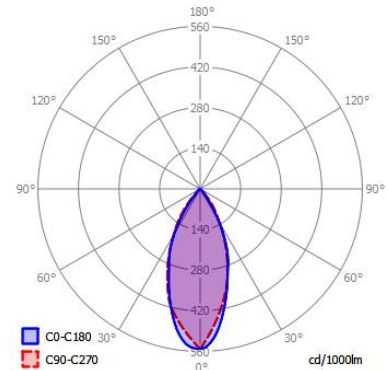

Offset [ft]	Diameter [ft]	Illuminance [fc]
2.0	1.45	139.9
4.0	2.91	34.93
6.0	4.36	15.51
8.0	5.82	8.73
10.0	7.28	5.57
12.0	8.73	3.9

## ORDERING INFORMATION

### -SUFFIX

Model Number	Cord Length		Finish	Color Temp.	LED Source
DUS759-11-20-03D	-2M	-5M	White	2700K	2W
DUS759-11-20-05D			Black		

Example of Catalog #: DUS759-11-20-03D-2M

DLS Lighting US  
 3135 SR 580, Suite 6  
 Safety Harbor, FL 34695  
[www.dslightingus.com](http://www.dslightingus.com)  
[dlsus@dslightingus.com](mailto:dlsus@dslightingus.com)

