


PROCEDURE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved. Do not install insulation within 3" of fixture sides or wiring compartment, nor above fixture in such a manner to entrap heat.

1. Pass the primary leads of the junction box through the round mounting plate. (Black/White/Earth)
Mount the round mounting plate on the junction box at the wall/ceiling. (use the screws *A)
2. Connect the primary leads of the junction box with the input leads of the driver. ATTENTION! Take care of the polarity. (black/black) (white/white) (green/ground)
3. Put the notch of CLIPPO lamp body on the bracket of the round mounting plate. (Only one way possible) Set and tighten the Allen screw (2 mm). Make sure the CLIPPO fixture is placed centred. ATTENTION: Carefully, place all the wiring into the fixture and junction box.
4. Adjust and rotate the lamp body in the position as desired.

• Necessary installation equipment and screws:

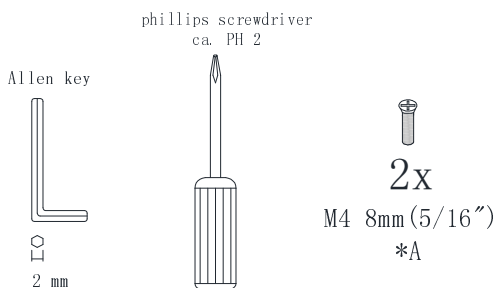

- Damp Location Listed
- CSAus Certified

IMPORTANT SAFETY INSTRUCTIONS:

- READ all the instructions before installation. Save instructions for later use.
- MIN 60°C SUPPLY CONDUCTORS.
- Turn off power at fuse or circuit breaker box before installation or before doing any maintenance work.
- Product must be mounted in locations and at heights and in manner consistent with its intended use, and in compliance with National Electric Code and local codes. Use of accessory equipment is not recommended.
- Installing contrary to instructions may cause unsafe conditions.
- Warning: Risk of fire. Consult a qualified electrician before installation.
- To avoid hazards to children, account all parts and properly dispose of all packaging materials.
- If there are any installation questions, contact us at <http://www.dslightingus.com>

