

**LILLI**

DUS255 White

**Project:****Type:****Cat. No.:**

LED Surface ceiling, pendant luminaire. Direct downlight.  
Driver included.

**FIXTURE:**

**Mounting:** surface ceiling  
**Finish/Reflector:** White  
**Material:** Aluminum  
Damp Location Listed (for use indoors)  
CSA/US Listed

**LAMP/LED SOURCE/COLOR TEMP:**

**-930**  
7W LED / 33° / 3000K / CRI ≥ 90 / 730lm  
Efficacy (CRI ≥ 90): 104lm/W, Rated life > 50000hrs

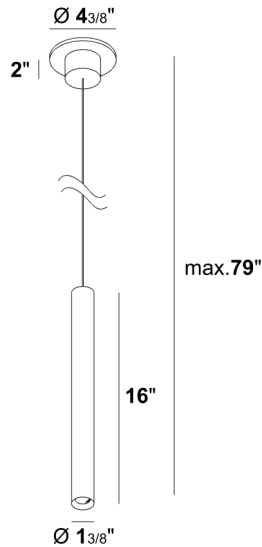
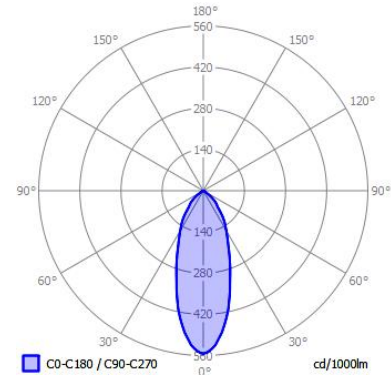
**DRIVER:**

**-120V-DIM**  
Class 2 120Vac/60Hz, TRIAC/ELV dimmable (leading/trailing edge),  
Power factor ≥ 0.9 / Flicker (THD) ≤ 20%, Constant current 350mA

photometric files, dimming compatibility list and warranty information  
available online at [www.dslightingus.com](http://www.dslightingus.com)



Shown above: DUS255-white-7W-930-120V-DIM

**Measurements (Inches)****Light Distribution / Illuminance (33°)**

Offset (ft)	Diameter (ft)	Illuminance (ftc)
2.0	1.40	101.2
4.0	2.81	25.3
6.0	4.21	11.2
8.0	5.61	6.3
10.0	7.01	4.0
12.0	8.42	2.8

**ORDERING INFORMATION****-SUFFIX**

Model Number	Finish	LED Source	Color Temp.	Driver
DUS255	-white	-7W	-930	-120V-DIM
-	-			
-	-			
-	-			

Example of Catalog #: DUS255-white-7W-930-120V-DIM

DLS Lighting US  
3135 SR 580, Suite 6  
Safety Harbor, FL 34695  
[www.dslightingus.com](http://www.dslightingus.com)  
[dlsus@dslightingus.com](mailto:dlsus@dslightingus.com)

