

GEO

DUS607 White
DUS605 Black

LED Surface wall/ceiling luminaire. Direct downlight, Adjustable LED-Head (350°/2x90°). Driver included.

FIXTURE:

Mounting: surface wall/ceiling
Finish: White, Black
Material: Aluminum
Damp Location Listed (for use indoors)
CSA/US Listed

LAMP/LED SOURCE/COLOR TEMP:

-927
5W LED / 24° / 2700K / CRI ≥ 90 / 370lm
Efficacy (CRI ≥ 80): 75lm/W, Rated life > 50000hrs

DRIVER:

-120V-DRI
Class 2 120Vac/60Hz, not dimmable,
Power factor ≥ 0.9 / Flicker (THD) ≤ 20%, Constant current 500mA

photometric files, dimming compatibility list and warranty information available online at www.dslightingus.com

Project:


Type:

Cat. No.:




Shown above: DUS607-white-5W-927-120V-DRI

Measurements (Inches)

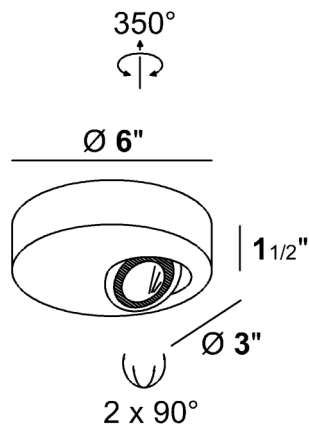

Light Distribution

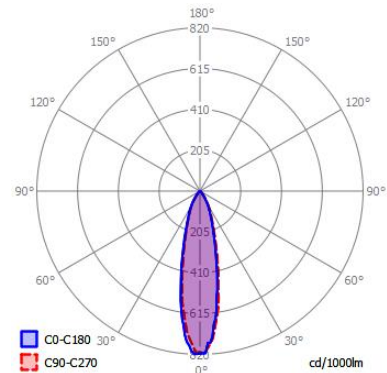

Offset [ft]	Diameter [ft]	Illuminance [ftc]
2.0	0.85	205.7
4.0	1.70	51.5
6.0	2.55	22.9
8.0	3.40	12.8
10.0	4.25	8.3
12.0	5.10	5.8

ORDERING INFORMATION

-SUFFIX

Model Number	Finish	LED Source	Color Temp.	Driver
DUS607	-white	-5W	-927	-120V-DRI
DUS605	-black			
-	-			
-	-			

Example of Catalog #: DUS605-black-5W-927-120V-DRI

DLS Lighting US
3135 SR 580, Suite 6
Safety Harbor, FL 34695
www.dslightingus.com
dlsus@dslightingus.com

263381

